

MAXIPRESS

SMALL LAUNDRY APPAREL PRESS

Model MP19

- Insulated Head Cover and Nickel-Plated Head Reduces Heat Loss, Saves Energy
- Designed for Finishing Pants, Shirts, Blouses and Small Wearing Apparel
- Uses Control Bar Operation
- Optional Two-Button Operation
- Available Steam or Electrically Heated
- Water Spray Standard




Model MP19

Specifications

Electrical connections		MP19	MP19E
Voltage: 230V 1PH 50/60Hz		—	×
WATTAGE		—	1600 W.
Approx. Consumption/Hour		—	.8 KWH
Steam and Air connection			
Steam Inlet	NPT	1/2"	—
Steam Outlet	NPT	1/2"	—
Rec. steam pressure	PSIG	100-125	—
	kPa	621-861	—
Steam consumption	BHP	.75	—
	kg/hr	11.7	—
Compressed air	NPT	3/8"	3/8"
Air consumption	free air/cycle at 68psig	0.23 CU.FT.	0.23 CU.FT.
	free air/cycle at 470kPa	6.5 liters	6.5 liters
Rec. air pressure	PSIG	68	68
	kPa	470	470
Water Inlet	NPT	1/4"	1/4"
Weight (crated)			
Shipping	lbs	335	335
	kg	152	152
Dimensions			
B (table width)		24"(610)	24"(610)
C (overall width)	Control Bar Closing	27 $\frac{1}{4}$ "(692)	27 $\frac{1}{4}$ "(692)
	Two-Button Closing	24"(610)	24"(610)
D	Control Bar Closing	13 $\frac{5}{8}$ "(346)	13 $\frac{5}{8}$ "(346)
	Two-Button Closing	12"(305)	12"(305)
<ol style="list-style-type: none"> Control bar Control Push Buttons Steam connection ~for steam heated models only Air connection Steam Outlet connection ~for steam heated models only Electrical connection ~for electric heated models only Water connection ~ for machines equipped with water spray attachment 			

WITH OPTIONAL TWO
BUTTON CLOSING

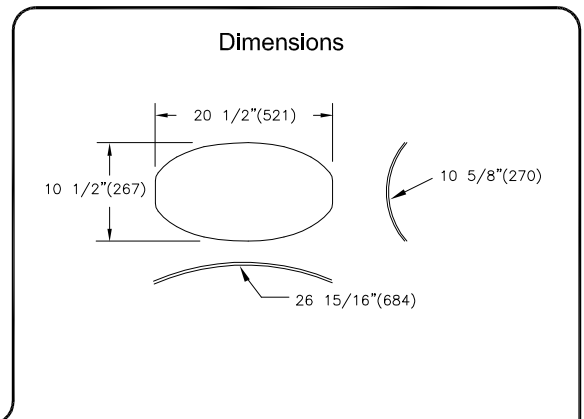

Detail Line Drawing (millimeters shown in parentheses)

