

MTD-2-25-MP

MTD-2-37-MP

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- ELECTRONIC CONTROL: Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSE DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- AXIRAD AIR FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric or gas.
- **Self-Service:** There are three self-service versions: to connect to a central pay, with a coin kit to work with coins/tokens, and with two coin kits (one for each microprocessor/drum).



OPTIONS

- SMART DRY: Intelligent Moisture Control.
- FIRE EXTINGUISHER: Integrated Fire Extinguishing System.
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



ELECTRONIC CONTROL



AXIRAD AIR FLOW



REVERSE DRUM



SMART DRY



STAINLESS STEEL DRUM



FIRE EXTINGUISHER



FULL FLOW



GENTLE DRY


TECHNICAL DATA

UNIT.

MTD-2-25-MP

MTD-2-37-MP

CAPACITY						
Capacity	Lb		25	37		
Capacity	Kg		11	16		
Hourly Output	Kg/h		34	53		
Evaporation capacity	l/h		17,5	27,4		
DRUM						
Ø Drum	mm		750	750		
Ø Door	mm		574	574		
Door center height	mm		547/1.522	547/1.522		
Load hole bottom height	mm		260/1.235	260/1.235		
Drum length	mm		475	746		
Drum volume	l		210	330		
POWER						
Drum motor power	Kw		0,25*2	0,25*2		
Fan Motor Power	Kw		0,25*2	0,25*2		
Total Installed power	Kw		25,1	25,1		
Electric Heating (Installed power)	Kw		12x2	12x2		
Gas heating (installed Power) in KW	Kw		12x2	12x2		
Gas heating (installed el. power)	Kw		1,1	1,1		
CONNECTIONS			ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + T	Nº x mm2 / A		-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A		4 x 25 / 80A	4 x 1,5 / 20A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A		5 x 10 / 40A	5 x 1,5 / 20A	5 x 10 / 40A	5 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS						
Width / Width	mm		785/865		785/865	
Depth / Depth	mm		955/1.055		1.225/1.325	
Height / Height	mm		1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg		260/268		290/303	
OTHERS						
Max airflow	m3/h		500*2		500*2	
Ø Fume exhaust	mm		200		200	
Sound level	dB		64		64	

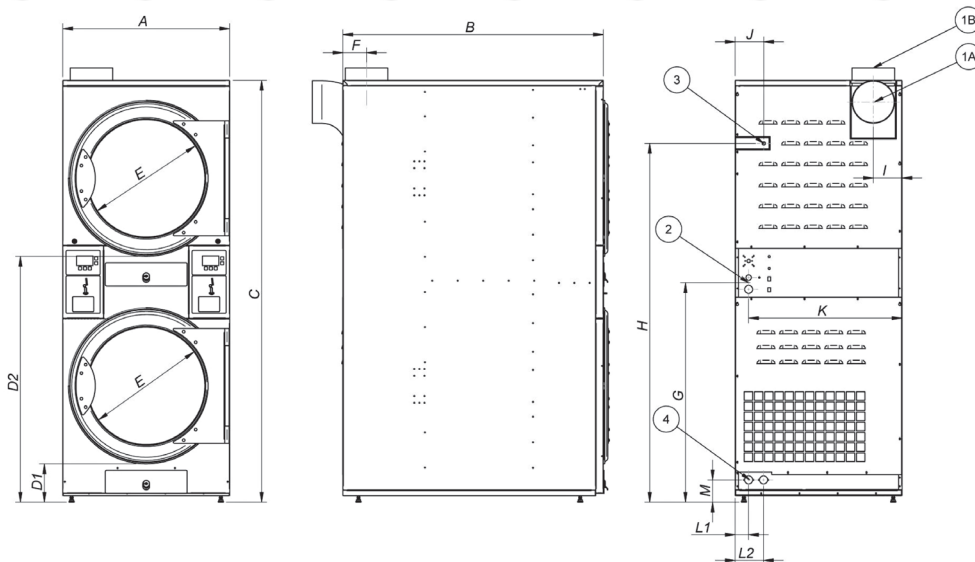

- 1A. Fumes outlet (rear option)
- 1B. Fumes outlet (upper option)
- 02. Electrical connection
- 03. Gas connection
- 04. Anti fire water valves

	A	B	C	D1	D2	E	F	G	H	I	J	K	L1	L2	M
MTD-25-MPC	785	955	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105
MTD-37-MPC	785	1.225	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA

Phone: 315 446-2180 Fax: 315-446-2431

E-mail: sales@maxico.com

