

## HIGH SPIN WASHER EXTRACTOR

**MWFH60 - MWFH80**  
**G FORCE = 450 | 25-35 kg**




### CHARACTERISTICS

- G Force = 450.
  - Drum and jacket in AISI-304 stainless steel.
  - Unit exterior manufactured in sandwich board, colour grey, stainless steel appearance, easy to clean, and which does not reflect fingerprints.
  - Detergent tray with 4 compartments.
  - 8 signals for automatic liquid dosing, programmable in time and delay. 6 extra signals available optionally.
  - 3 standard water inlets.
  - Variable-frequency drive (standard 50-60 Hz). Balancing system controlled by the same drive.
  - **New second-generation TOUCH PLUS programmer**
  - Allows programming, importing and exporting of programs and software updates via USB.
  - Traceability as standard: the whole wash process (temperatures, water levels) is stored on the washer and is extractable to a PC by USB memory.
  - The programmer includes the characteristics to create any Wet Cleaning program (modifiable water levels and washing speed).
  - **EFFICIENT MIX.** These machines are equipped with an automatic water mixer (mixing different water temperatures) which provides energy savings and reduces washing times.
  - **BALANCE CONTROL.** Thanks to an advanced technological development, and by means of the inverter, the washers detect the imbalance at an early stage. This way the operation is much smoother, elongating components lifetime and reducing washing times, thus saving energy as well.
  - **MULTICHOICE INLET.** All washers are equipped with a third water inlet as standard, which allows you to save filling time, or which can be used for decalcified water, ozone or recycled water.
  - **WET CLEANING.** WET CLEANING. All washers incorporate the necessary features to use the WET CLEANING system as standard, avoiding investment in expensive applications to work with this advanced washing concept. This feature replaces most dry-cleaning washing systems, bringing maximum reduction in costs.
  - **MAINTENANCE KARE.** A simple and reliable design with easy-to-access mechanical parts that combines perfectly with the use of intelligent electronics. All components have been designed and manufactured with top quality and prestige, focusing on optimum accessibility for all points and components key to maintenance. Moreover, all the controls have been developed down to the finest detail: complete technical menus, fault self-diagnosis systems, alarms, restricted access areas, etc.
  - **OPTIMIZED DRUM.** This system has been developed to improve wash quality to the maximum and to do it in as short a time as possible. Through a series of perforations in the paddles of the machine, a water cascade effect is achieved which increases the mechanical action of the drum during operation and greatly reduces the amount of water needed for each wash. The effective design of the drum and tank with minimal spaces between them, allows the energy consumption necessary to heat the water, as well as the superfluous use of chemical products, to be reduced.
  - **OPTIMAL CONSUMPTION.** All washers are equipped with an efficient system by means of which you can indicate the load which is introduced in the machine. The washer automatically adapts the quantity of water and chemicals to be used for that load.
  - **“LOADING AID”** system. Water inlet and spin control for loading the linen.
  - The standard model can be converted to self-service by installing a pay station kit, coin mechanism kit or other payment system. RS-485 communication.
  - Washers compatible with water recovery tanks.
  - **CE, WRAS and EAC product certifications.** Optional ETL-certified version of the machine.
- OPTIONS:
- Unit exterior in AISI-304 stainless steel.
  - Front panels in AISI-304 stainless steel.
  - Different levelling plinth kits to level machines by total height or by loading height (850 mm between door base and floor).
  - Double drain kit to recover the water, with important savings.
  - NC Option: drain normally closed.
  - Levelling feet.
  - Reversible door opening.
  - Silicone seal for 11 and 14 kg models.
  - 6 extra signals for dosing.
  - **AUTO WEIGHT** Automatic linen weighing system. Up to 30% savings. (Automatic adjustment of water and soap consumptions as well as energy savings, according to the load inserted, measured automatically by the washer).
  - Timed opening system.
  - Printer.
  - Marine electric versions for ships.
  - Tropicalised models with protective covering for the electronics system.
  - **Shower system:** water recirculation for very delicate linen (wet cleaning complement).

## TECHNICAL DATA

	UNIT.	MWFH-60	MWFH-80		
<b>DRUM</b>					
Load capacity	Lbs/kg	60/25	80/35		
Volume	Lit	250	350		
Diameter	mm	770	860		
Depth	mm	530	602		
<b>GENERAL DATA</b>					
Wash speed / Spin speed	r.p.m.	45/1,024	42.5/966		
G Force	-	450	450		
Maximum force transmitted	kN	4.92 ±1.75	7.36 ±2.45		
Dynamic force frequency	Hz	15	14.3		
Noise level	dB	< 70	< 70		
Self-service version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing system	-	Opt.	Opt.		
<b>DOOR</b>					
Height door centre / Height door base	mm	865 / 560	885 / 540		
Diameter	mm	460	560		
<b>POWER</b>					
Motor	kW	4	4		
Heating electric mod.	kW	18	21		
Maximum electrical power	kW	19.2	22		
Maximum steam and hot water power	kW	4	4		
<b>CONNECTIONS</b>					
		<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>
Voltage 230V - I + N	N° x mm² / A	3 x 25 / 100 A	3 x 1.5 / 16 A	-	-
Voltage 230V - III	N° x mm² / A	4 x 10 / 50 A	-	4 x 25 / 100 A	4 x 1.5 / 6 A
Voltage 400V - III + N	N° x mm² / A	5 x 4 / 32 A	-	5 x 16 / 63 A	5 x 1.5 / 16 A
Steam input (Steam mod.)	inch	3/4"		3/4"	
Maximum steam consumption (Steam mod.)	kg/h	15		18	
Water inlet	inch	3/4"		3/4"	
Grid pressure	kg/cm²	2-4		2-4	
Maximum water consumption *	Lit/h	175.5*		261.3*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / DIMENSIONS WITH PACKAGING</b>					
Width / Width	mm	979 / 1,040		1,095 / 1,165	
Depth / Depth	mm	1,041 / 1,160		1,184 / 1,230	
Height / Height	mm	1,553 / 1,850		1,598 / 1,920	
Net weight / Gross weight	kg	490 / 545		750 / 820	
Gross volume (with packaging)	m³	2.23		2.75	

\* Program n° 20, 75 % load.

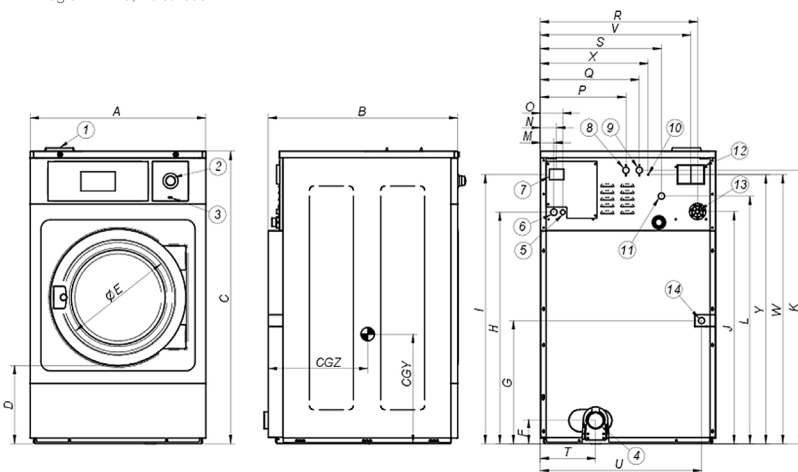

- ① Soap dispenser.
- ② Emergency stop.
- ③ USB port.
- ④ Drain.
- ⑤ Electrical connection to liquid soap pumps.
- ⑥ Electrical connection.
- ⑦ Main switch.
- ⑧ Auxiliary water inlet.
- ⑨ Hot water inlet.
- ⑩ Earth connection.
- ⑪ Cold water inlet.
- ⑫ Water overflow.
- ⑬ Connection for liquid soap.
- ⑭ Steam connection.

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
MWFH-60	979	1,041	1,553	560	460	133	490	1,282	1,450	1,259	1,465	1,354	61	74	101	481	561	861	673	367	909	831	1,424	624	1,510	773	710
MWFH-80	1,095	1,184	1,598	540	525	158	576	1,330	1,498	1,297	1,513	1,383	61	74	101	596	676	976	808	384	1,028	946	1,462	861	1,558	795	732