

MAXIDRY

DRYING SOLUTIONS - IT SERIES

PROFESSIONAL DRYERS IT SERIES 6 AND 8 KG

Compact design

New programming display, new UX.
Suitable for built-in and stackable
with washing machine.

New door filter on more larger door

New loading door complete with
large filter.

304 stainless steel casing

Drum, front and top panel made
of stainless steel.



Energy saving

Available with heat pump for
installation in closed room.

Delicacy in drying

BUTTERFLY drying system
protects fabrics.

Reliability

Robust brushless industrial motor
for noise reduction, two additional
supporting rolls for better stability.



OPTIONS and ACCESSORIES

- Crankcase h 300 mm
- Mechanical or electronical coin box for self-service use




Company Certified ISO 9001
(NR. CERT-00663-95-AQ-VEN-SINCER)



The images are to be considered purely indicative of the actual product

TECHNICAL DATA	IT 6 C EE	IT 8 EE HP
- Capacity 1:18 - 1:20	6,5 - 6 Kg (14 - 12 lb)	8,1 - 7,3 Kg (19 - 16 lb)
- Drum volume	117 lt	145 lt
- Air sound intensity	65 - 66 dB (A)	65 dB (A)
- Vent air\smokes Ø (if foreseen)	100 mm (3.9 inch.)	100 mm (3.9 inch.)
- Machine dimensions WxDxH (100 mm = 3.93 inch.) C - EE - HP	595x654x850 mm	595x769x850 mm
- Net weight C - EE	43 - 37,4 Kg (95-82 lb)	43 Kg (95 lb)
- Net weight HP	45 Kg (99 lb)	58 Kg (128 lb)
- Packing dimension WxDxH (100 mm = 3.93 inch.)	640x723x920 mm	640x838x920 mm
- Gross weight	47 - 41,8 Kg (104-93lb)	47 - 62 Kg (106-137 lb)
- Packaging volume	0,43 mc (15.2 ft³)	0,49 mc (16.9 ft³)
- Installation electric power C - EE	2,8 - 3,3 kW	3,3 kW
- Installation electric power HP	-	1 kW
- 1ph230V 50 Hz / 3ph400V + N 50 Hz	16 A / 10 A	16 A / 10 A
- Supply cable length	2300 mm (90.6 inch.)	2100 mm (82.7 inch.)
- STD. packed machines in to 20' container	54 pz. sovrapposte	50 pz. stackable
- STD. packed machines in to 40' container	108 pz. sovrapposte	104 pz. stackable

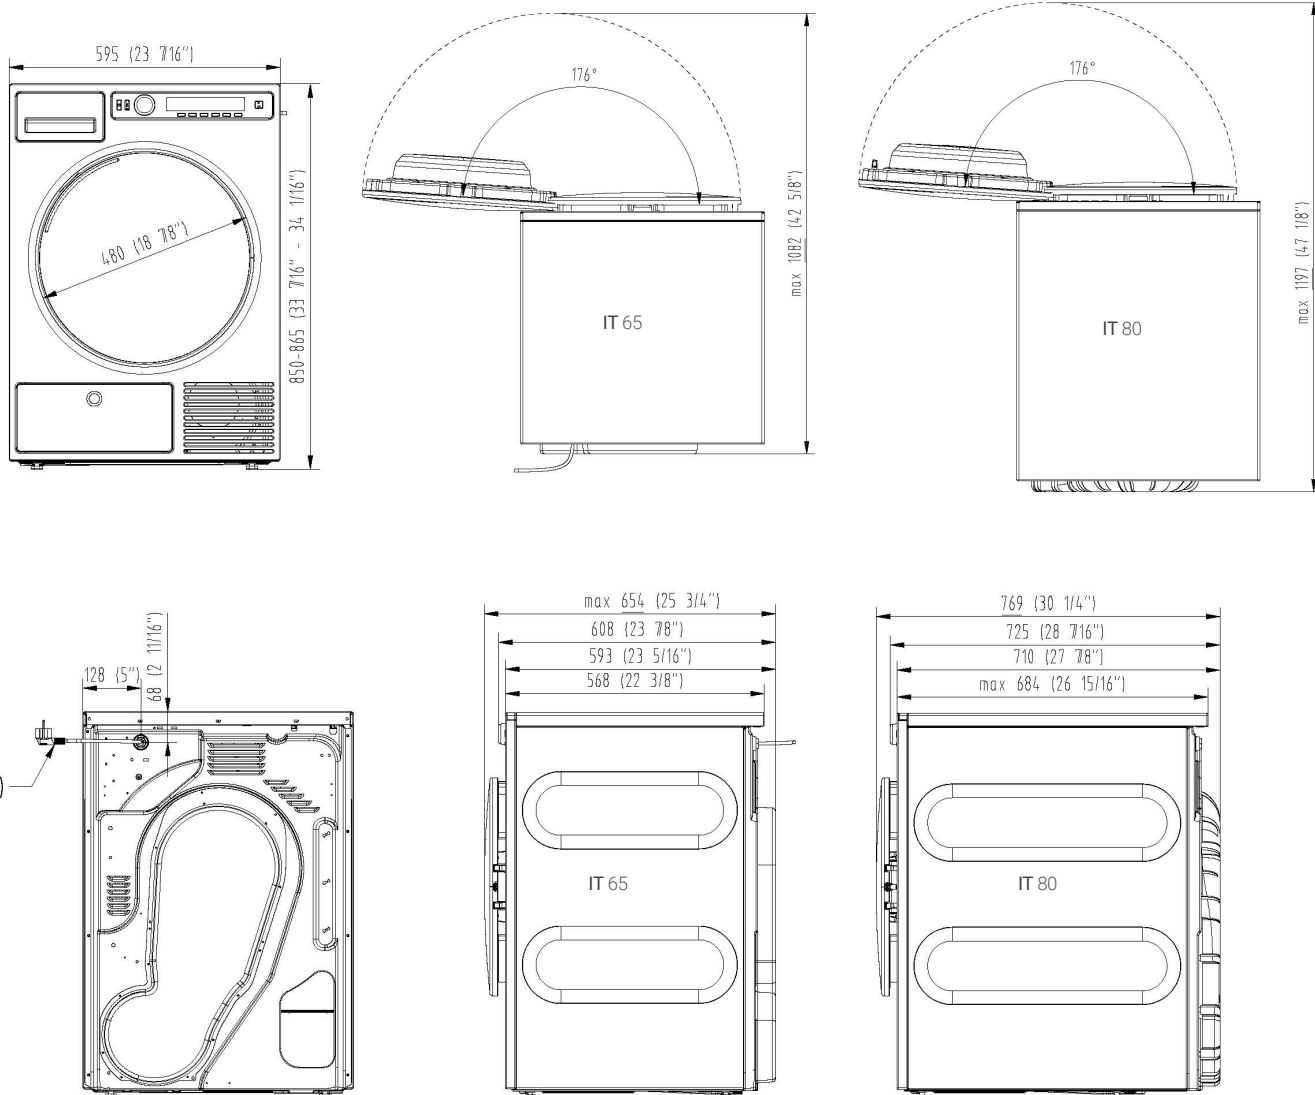

100 mm = 3.93 inch. - factor conversion 1 / 25,4