

MAXIWASH

WASHING SOLUTIONS - HSI SERIES

PROFESSIONAL WASHERS HSI 6 AND 8 KG

Compact design

New programming display, new UX. Suitable for built-in and stackable with dryer.

TOP performance, spin 1400 rpm.

Disinfection programs at 90°, 60° and 40° and MOP programs for cleaning companies.

304 stainless steel casing

Drum, front and top panel made of stainless steel.

Laundry weighing system

Automatic recognition of the laundry weight.

External control unit

Control card for the management of the dosing and payment system.

Unbalance control

Anti-balancing 3D sensor and "ACTIVE DRUM™" system.



OPTIONS and ACCESSORIES

- Kit 3 peristaltic automatic dosing pumps with programmable washing formulas
- Crankcase h 300 mm
- Mechanical or electronical coin box for self-service use




Company Certified ISO 9001
(NR. CERT-00663-95-AQ-VEN-SINCER)



The images are to be considered purely indicative of the actual product

TECHNICAL DATA

	HSI 6	EDV EDP	HSI 8	EDV EDP
- Capacity 1:9 - 1:10	6,7 - 6 Kg (15 - 13 lb)		8,9 - 8 Kg (20 - 18 lb)	
- Drum volume	60 lt		80 lt	
- Drum diameter Ø	480 mm (18.9 inch.)		480 mm (18.9 inch.)	
- Load diameter Ø	310 mm (12.2 inch.)		310 mm (12.2 inch.)	
- Spin speed	1400 r.p.m.		1400 r.p.m.	
- G Factor	524		524	
- Airborne acoustical noise emission class (a)	A++		A++	
- Sound pressure and sound power	< 70 dB < 74 dB		< 70 dB < 74 dB	
- Machine dimension WxDxH (100 mm = 3.93 inch.)	595x591x850 mm		595x706x850 mm	
- Net weight	76,5 - 77 Kg (167.5 lb)		92 - 92,5 Kg (203 lb)	
- Packing dimension WxDxH (100 mm = 3.93 inch.)	640x661x920 mm		640x776x920 mm	
- Gross weight	79,7 - 80,2 Kg (172 lb)		95,4 - 95,9 Kg (207 lb)	
- Packaging volume	0,40 mc (13.7 ft³)		0,46 mc (16.2 ft³)	
- After spin residual humidity %	49 %		49 %	
- Installation electric power	3,2 kW		4,6 kW	
- 1ph230V 50 Hz / 3ph400V + N 50 Hz / 3ph 230V + 50 Hz	16 A / 10 A		16 A / 10 A	
- Supply cable length	210 cm (82.7 inch.)		180 - 210 cm (71 inch.)	
- Water connexion	2 x 3/4 "		2 x 3/4 "	
- Inlet tube length	1500 mm (59 inch.)		1500 mm (59 inch.)	
- Drain tube length	1600 mm (63 inch.)		1600 mm (63 inch.)	
- Diameter tube length Ø	20 mm (0,80 inch.)		20 mm (0,80 inch.)	
- STD. packed machines in to 20' container	54 pz. sovrapposte		54 pz. stackable	
- STD. packed machines in to 40' container	108 pz. sovrapposte		108 pz. stackable	

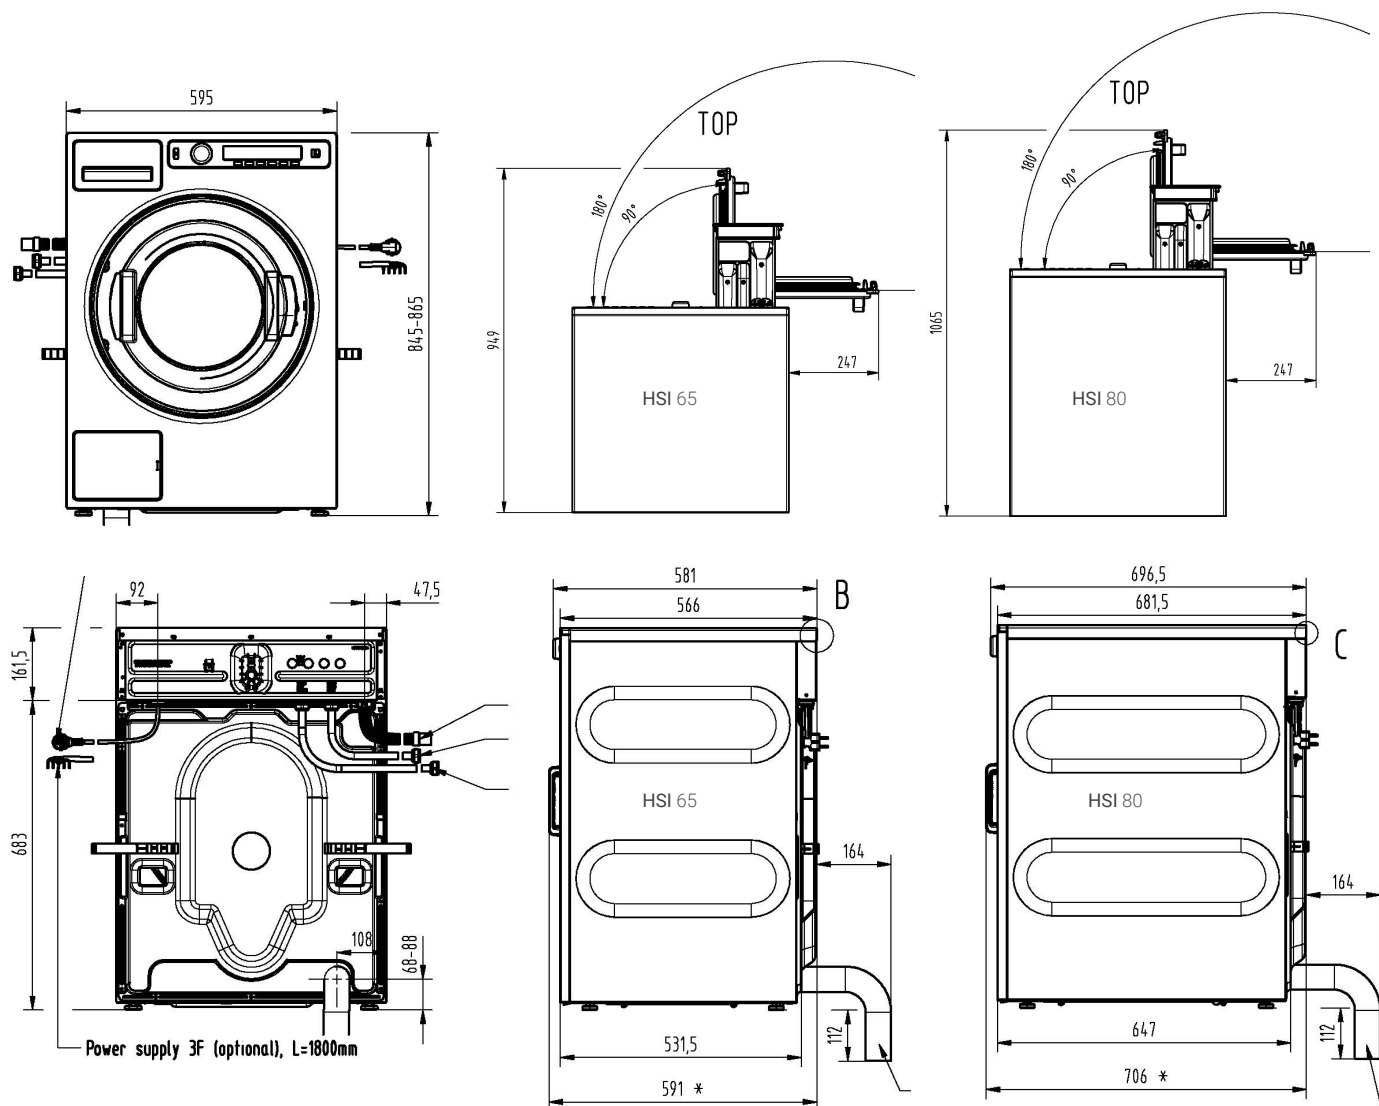

100 mm = 3.93 inch. - factor conversion 1 / 25,4

C150601X - Specification and technical data are subject to modification.

MAXIWASH